

Look Smart, Work Smart

The IC-F5400D/F6400D series is Icom's new generation IDAS mobile radios. Incorporating cutting edge design, superb performance and a comprehensive range of features on a flexible, upgradable multi-protocol platform. The series is available in both VHF and UHF with either a numeric or full color high resolution LCD. Multiple controller configurations are available to suit almost any vehicle application.

High resolution color LCD

Multiple operating modes (Available mode depending on version)

- NXDN™/dPMR™ conventional
- Upgradable to NXDN™ Type-D trunking
- Upgradable to dPMR™ Mode 3 trunking
- Analog FM

Built-in Bluetooth®, voice recording, active noise canceller functions*

* Version without Bluetooth® also available.
Ask your Dealer for details.

Encryption: DES (4-key, 64-key), AES*

* 4-key standard. 64-key DES requires UT-134.
AES requires UT-134 and ISL-AKAES.

Optional OTAR (Over-the-Air-Rekeying) function for AES/DES

Optional OTAP (Over-the-Air-Programming) function

IP55 jet water resistance and dust-protection

Optional detached controller, dual head or COMMANDMIC™ configurations



IC-F5400D

FELLECS TECH

Ihr Partner für Funktechnik

www.fellecs-tech.com

inbox@fellecs-tech.com

IDAS™
ICOM DIGITAL ADVANCED SYSTEM

NXDN™

dPMR™
digital

General Features

- 136–174, 380–470, 450–520 MHz versions
- 1024 Channels / 128 Zones
- 4000 Channels with optional license key, ISL-CHEX
- High resolution color LCD and intuitive user interface
- Large sized function and four-direction buttons
- Day and night mode display settings
- Programmable functions and menu items in a language other than English (For example French, Spanish, German, Russian and Turkish)
- MIL-STD-810 G shock, vibration, temperature and more
- IP55, water jet resistance and dust protection
- DTMF autodial and decoder

Operating Mode (Available mode depending on version)


- NXDN or dPMR Mode 1/Mode 2 conventional
- NXDN or dPMR multi-site conventional over IP network
- NXDN Type-D single/multi-site trunking*
* License key (ISL-UGMTR) required.
- dPMR Mode 3 trunking*
* License key (ISL-UGMD3) required. Not available in all regions.
- 12.5 kHz digital mode (NXDN conventional)
- Analog mode
- Analog/digital mixed operation

Digital Functions (Voice and Data)

- Over-the-Air Programming (OTAP) function*
* OTAP manager (CS-OTPM1) required.
- Over-the-Air Alias (OAA) sends own name with a call
- Over-the-Air Update (OTAU) changes the repeater channel data and site code over the air (NXDN Type-D trunking)
- Individual, group and all call
- Late entry for group call
- Unit ID and talkgroup display on receive
- Status call and polling
- Short data messages (up to 100 characters)
- Call alert (NXDN)
- GPS position
- Transparent data mode

Analog Functions

- CTCSS and DTCS tone
- 2-Tone and 5-Tone
- MDC functions (Depending on version)
- BIIS 1200 functions (Depending on version)
- LTR™ trunking (Depending on version)



Check our web site to know more about
6.25 kHz FDMA narrow band.
<https://www.icomjapan.com/explore/digital/>

Security and Safety

- Encryption: DES (4-key, 64-key)*, AES
* 4-key standard. 64-key DES requires UT-134.
AES requires UT-134 and ISL-AKAES.
- Over-the-Air-Rekeying (OTAR) function*
* OTAR manager (CS-OTAR1) required.
- Digital voice scrambler (Low level encryption)
- Analog voice scrambler (Inversion)
- Power ON password
- Tactical group temporarily reconfigures user talkgroups
- Remote Kill, Stun and Revive
- Remote monitor (NXDN)/ambience listening (dPMR)
- Power OFF emergency
- Emergency key for emergency call
- Lone worker function

Scan Functions

- Priority scan
- Voting scan for site roaming

Voice/Audio Functions

- Voice announcement (Channel number and zone)
- VOX function for hands-free operation
- Voice recording/playback (Saves to a microSD card)*
* A microSD card is required separately.
- The following information can be embedded in the WAV file;
user IDs, GPS position, frequency, AF volume, RSSI, etc.
(Depending on setting).
- Customized channel announcement
- TX/RX active noise canceller
- TX/RX audio equalizer (Flat, high/mid/low boost, low cut)
- Audio compander (Analog mode)

Hardware Features

- Programmable ringer beep*¹
- Built-in Bluetooth® for wireless audio and data*¹
- A third-party wireless Bluetooth® headset*¹
(for example, 3M™ Peltor™ WS™ 5 series) can be used*
* Compatibility with third-party Bluetooth® headsets cannot
be guaranteed.
- Wireless radio programming over Bluetooth®*¹
- USB connector for data transfer mode or card reader mode
- Built-in GPS with GPS position screen and auto log function*
* An optional GPS antenna UX-241 is required.
- Internal clock with time auto adjustment
- Programmable D-SUB connector for external PTT, channel,
horn, PA/RX speaker, ignition switch and dimmer control
- Low voltage alert
- Optional detached controller, dual head controller or
COMMANDMIC™ configurations
- Intercom function between dual head controller
or COMMANDMIC™
- microSD card slot

*¹ Version without Bluetooth® also available. Ask your Dealer for details.

SPECIFICATIONS

IC-F5400D • IC-F6400D

| | | IC-F5400D NXDN Version | IC-F5400DP dPMR Version | IC-F6400D NXDN Version | IC-F6400DP dPMR Version |
|--|-------------------------|--|---|---|---|
| GENERAL | | | | | |
| Frequency coverage* (* Depending on version) | | 136–174 MHz | 136–174 MHz | 380–470 MHz, 450–520 MHz | 380–470 MHz |
| Number of channels | | 1024 channels /128 zones 4000 channels /128 zones (Option)*1 | | | |
| Type of emission* (* Depending on version) | | 16K0F3E*2, 14K0F3E, 11K0F3E, 8K50F3E, 8K30F1E/D, 4K00F1E/D | 16K0F3E*2, 14K0F3E, 8K50F3E, 4K00F1E/D | 16K0F3E*2, 14K0F3E, 11K0F3E, 8K50F3E, 8K30F1E/D, 4K00F1E/D | 16K0F3E*2, 14K0F3E, 8K50F3E, 4K00F1E/D |
| Power supply requirement | | 13.6 V DC nominal (USA/EXP), 13.2 V DC nominal (EUR) | | | |
| Current drain (approx.) | Tx | 9.0 A typical (at 50 W) 5.0 A typical (at 25 W) | | 8.8 A typical (at 45 W) 5.0 A typical (at 25 W) | |
| | Rx | 0.9 A typical/370 mA typical (Max. audio (Internal SP)/Standby) | | 0.8 A typical/270 mA typical (Max. audio (Internal SP)/Standby) | |
| Antenna impedance | | 50 Ω | | | |
| Operating temperature range | | –30 °C to +60 °C; –22 °F to +140 °F | | | |
| Dimensions (W × H × D;Projections not included) | | 174 × 55 × 150 mm; 6.9 × 2.2 × 5.9 in | | | |
| Weight (approx.) | | 1.5 kg; 3.3 lb | | | |
| TRANSMITTER | | | | | |
| Output power (Hi, L2, L1)* (* Depending on version) | | 50 W, 25 W, 5 W (USA/EXP) 25 W, 10 W, 5.8 W (EUR) | | 45 W, 25 W, 4.5 W (USA/EXP) 25 W, 10 W, 5.8 W (EUR) | |
| Frequency stability | | ±1.0 ppm | | | |
| Spurious emissions | | 90 dB typical (USA) 0.25 μW (≤ 1 GHz), 1.0 μW (> 1 GHz) (EUR) | | 80 dB typical (USA) | |
| FM Hum and noise | | 54 dB typical (@25 kHz), 54 dB typical (@12.5 kHz) | | | |
| Audio harmonic distortion | | 0.5% typical (AF 1 kHz 40% deviation) | | | |
| FSK error | | 1% typical (@DVN/DN) | | | |
| RECEIVER | | | | | |
| Sensitivity | Analog (12 dB SINAD) | 0.22 μV typical | | 0.25 μV typical | |
| | Analog (20 dB SINAD) | –4.0 dBμV emf typical (@25 kHz), –4.0 dBμV emf typical (@12.5 kHz) | | | |
| | Digital (1% BER) | –6.0 dBμV emf typical (0.25 μV typical) (@DVN), –5.0 dBμV emf typical (0.28 μV typical) (@DN) | | | |
| Adjacent channel selectivity | Analog | 75 dB typical (@25/20 kHz), 72 dB typical (@12.5 kHz) | | | |
| | Digital | 65 dB typical (@DVN), 68 dB typical (@DN) | | | |
| Spurious response rejection | | 85 dB typical | | | |
| Intermodulation rejection | Analog | 78 dB typical (USA) 70 dB typical (EUR) | | 75 dB typical (USA) 70 dB typical (EUR) | |
| | Digital | 70 dB typical (@DVN), 70 dB typical (@DN) | | 70 dB typical (@DVN), 70 dB typical (@DN) | |
| Audio output power | Internal SP | 4.0 W typical (at 5% distortion with 4 Ω load) | | | |
| | External SP | 4.0 W typical (at 5% distortion with 4 Ω load) | | | |

Measurements made in accordance with TIA-603, EN300 086, EN301 166, EN300 113. All stated specifications are subject to change without notice or obligation.

*1 Optional license key (ISL-CHEX) required.

*2 25 kHz bandwidth is no longer available for FCC Part 90 licensees for USA versions.

DVN: Digital Very Narrow (6.25 kHz), DN: Digital Narrow (12.5 kHz). DN is for NXDN version only.

Applicable U.S. Military Specifications & IP Rating

| Standard | MIL 810G | |
|-------------------|----------|-----------|
| | Method | Procedure |
| Low Pressure | 500.5 | I, II |
| High Temperature | 501.5 | I, II |
| Low Temperature | 502.5 | I, II |
| Temperature Shock | 503.5 | I-C |
| Solar Radiation | 505.5 | I |
| Rain Blowing/Drip | 506.5 | I, III |
| Humidity | 507.5 | II |
| Salt Fog | 509.5 | – |
| Dust Blowing | 510.5 | I |
| Vibration | 514.6 | I |
| Shock | 516.6 | I, IV |

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

| Ingress Protection Standard | |
|-----------------------------|---|
| Dust & Water | IP55 (Dust-protection and jet water resistance) |

Supplied accessories: (May differ depending on version)

• Hand microphone, HM-220 or HM-221 • DC power cable • Mounting bracket kit • Microphone hanger

■ HAND MICROPHONES AND DESKTOP MICROPHONE

HM-220: Heavy duty microphone. IP54 protection.
HM-220T: Heavy duty microphone with DTMF keypad. IP54 protection.
HM-221: Hand microphone with emergency button. IP55 protection.
HM-221T: Hand microphone with DTMF keypad and emergency button. IP55 protection.
SM-29: Desktop microphone with monitor and monitor lock buttons.



■ COMMANDMIC™ AND SEPARATION KITS

HM-218: Remote control microphone for use with RMK-5. IP55 protection.
RMK-5: Separation kit. For detached controller configuration.
RMK-7: Dual-head separation kit. Separation kit and secondary controller for dual head configuration.



■ SEPARATION CABLES

OPC-2364: 1.9 m; 6.2 ft separation cable for RMK-5 or RMK-7.
OPC-2365: 3 m; 9.8 ft separation cable for RMK-5 or RMK-7.
OPC-2366: 5 m; 16.4 ft separation cable for RMK-5 or RMK-7.
OPC-2367: 8 m; 26.2 ft separation cable for RMK-5 or RMK-7.
OPC-2373: 1.9 m; 6.2 ft separation cable for HM-218, COMMANDMIC.
OPC-2374: 8 m; 26.2 ft separation cable for HM-218, COMMANDMIC.



■ EXTERNAL SPEAKERS

SP-30: External speaker. Cable length 2.6 m; 8.5 ft.
SP-35: Compact external speaker. Cable length 2 m; 6.6 ft.
SP-35L: Compact external speaker. Cable length 6 m; 19.7 ft.



■ GPS ANTENNA


UX-241: External GPS antenna. Cable length 5 m; 16.4 ft.

■ AES/DES ENCRYPTION UNIT

UT-134: AES/DES encryption unit.

■ ZONE COPY, PROGRAMMING AND DC POWER CABLES

OPC-2362: Zone copy cable. Mobile to handheld cable.
OPC-2363: Programming cable.
OPC-1132: DC power cable. Cable length 3 m; 9.8 ft.
OPC-347: DC power cable. Cable length 7 m; 23 ft.

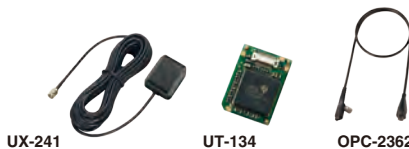

■ SOFTWARE AND ACTIVATION KEYS

CS-F3400D: Programming software.
CS-KLD2: Key-loader for UT-134.
CS-OTPM1: OTAP manager software.
CS-OTAR1: OTAR manager software.
ISL-UGMTR: NXDN™ Type-D trunking upgrade key.
ISL-UGMD3: dPMR™ Mode 3 upgrade key.
ISL-AKAES: AES activation key.
ISL-CHEX: Channel expansion key.
ISL-AK25K: 25 kHz activation key.
ISL-AKSTM: Dealer set mode activation key.

Some options may not be available in some countries. Please ask your dealer for details.



Detached Controller

Optional RMK-5
and separation cable required.



Dual Head Controller

Optional RMK-7, hand microphone
and separation cables required.



COMMANDMIC™ and Detached Controller

Optional RMK-5, COMMANDMIC,
HM-218 and separation cables required.

Use of these products are dependent on local regulations. Icom and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. COMMANDMIC is a trademark of Icom Incorporated. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license. 3M, Peltor, and WS are trademarks of 3M Company. NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation. dPMR and the dPMR logo are trademarks of the dPMR MoU Association. IDAS and IDAS logo are trademarks of Icom Incorporated. LTR is a trademark of the E.F. Johnson Technologies, Inc. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icomjapan.com

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Shanghai Icom Ltd.
www.bjicom.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com

Your local distributor/dealer:

FELLECS TECH

Ihr Partner für Funktechnik

www.fellecs-tech.com

inbox@fellecs-tech.com